

conceptillumination

L.E.D. CEILING DOWNLIGHT 65 Watt



The LED commercial ceiling downlight is designed to replace traditional fluorescent ceiling light fixtures particularly in commercial buildings.

When compared to traditional fluorescent ceiling lighting, L.E.D. ceiling lights are as bright, easier on the eyes and use less energy with virtually no maintenance required.

Regular brightness and high brightness models available in a variety of colours and sizes.



Features (2'x2', 5000K, high-brightness)

Lumen Output	3995 lm
Input Power	65W
Efficacy	61.36 lm/W
Colour Temperature (CCT)	5000K
Colour Rendering Index (CRI)	77
Rated Life	50.000 Hours @ 70% Lumen Maintenance
Max Intensity	1687.5 cd
Central Intensity	1687.5 cd
Drive Current	0.595A
Power Factor	0.995
Mounting Options	Surface Mount, Suspended
Dimensions	2'x2', 1'x4', Custom
Operating Temperature	-40°C to +45°C
Voltage	110 VAC @ 50-60 Hz

Certification




Environment

Indoor use only


Photometric Data

Lux vs. Distance Curve

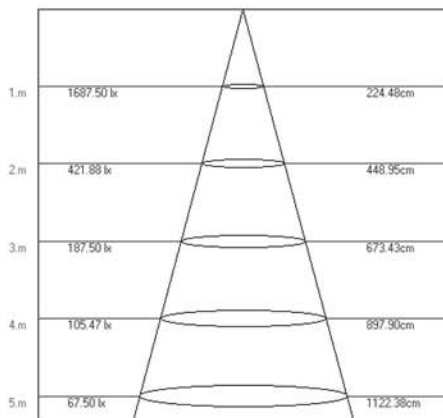

Height Illuminance
Beam angle: 96.60 Deg.

Diameter

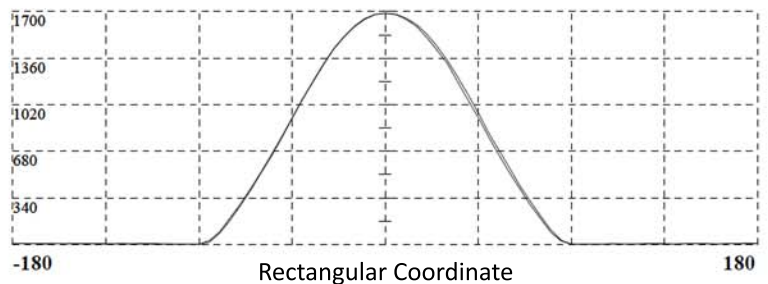

Rectangular Coordinate

LED
EDUCATION
TO
INSTALLATION

www.conceptillumination.com
montréal | québec | canada

CONTACT US TODAY:
514.933.2174

info@conceptillumination.com